# FIS GAS SENSOR SP-42A

for REFRIGERANT DETECTION(R134a,R-410a,R-407c)


The SP-42A is a tin dioxide semiconductor gas sensor which has a high sensitivity to HFCs (e.g. Freon: R-134a) with improved cross sensitivity to other gases. This model is suitable for R-134a, R-410a, R-407c and other new freon family which contain R-134a.

### Structure

Gas sensitive semiconductor material is formed on the alumina substrate on which the gold electrodes are printed. A thick film heater of ruthenium oxide is printed on the reverse of the substrate and placed in the plastic housing (Fig 1).

### **Operating conditions**

Fig 2 shows the standard operating circuit for this model. The change of the sensor resistance ( $R_s$ ) is obtained as the change of the output voltage across the fixed or variable resistor ( $R_L$ ). In order to obtain the best performance and specified characteristics, the values of the heater voltage ( $V_H$ ) circuit voltage ( $V_c$ ) and load resistance ( $R_L$ ) must be within the range of values given in the standard operating conditions shown in the Specification table on the next page.

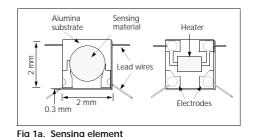

100 mesh SUS 316 gauze

(double)

Plastic housing

Plastic base

heater pins (Nickel)

Fig 1b. Configuration

Sensitivity characteristics

characteristics curves of the SP-

42A (typical data). Sensitivity

characteristics of the FIS gas

sensors are expressed by the

with an increase of gas

logarithmic function.

concentration based on a

relationship between the sensor


The sensor resistance decreases

resistance and gas concentration.

Fig 3 shows the sensitivity

Electrode and

Sensing element








Fig 1d. Equivalent circuit

The sensitivity characteristics of the SP-42A is specified by the following parameters.

- Sensor resistance level: at R-134a 100 ppm
- Sensor resistance change ratio: between R-134a 100 ppm and 300 ppm

See the specification table on the next page for further details.


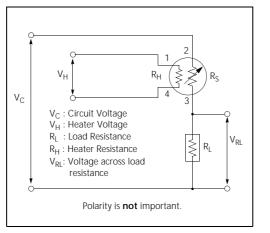




Fig 2. Standard circuit

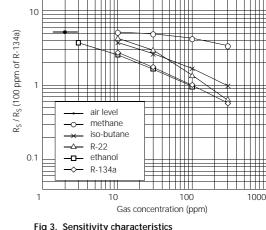

Sweek www.isweek.com

Add: 16/F, Bldg. #3, Zhongke Mansion, No.1 Hi-Tech S. Rd, Hi-Tech Park South, Shenzhen, Guangdong, 518067 P.R.China Tel: + 86-755-83289036 Fax: + 86-755-83289052 E-mail: sales@isweek.com

# Specifications

# A. Standard Operating conditions

Symbol	Parameter	Specification	Conditions etc.
Symbol	Tarameter	specification	conditions etc.
V <sub>H</sub>	Heater voltage	5.0 V ± 4 %	AC or DC
V <sub>C</sub>	Circuit voltage	5.0 V ± 4%	AC or DC
RL	Load resistance	Variable	P <sub>S</sub> < 15 mW
R <sub>H</sub>	Heater resistance	$40~\Omega\pm 2~\Omega$	at room temperature
$P_H$	Heater power consumption	400 mW (Typical value)	$P_{H} = V_{H}^{2} / R_{H}$
P <sub>S</sub>	Power dissipation of sensing element	Less than 15 mW	$P_{S} = \frac{(V_{C} - V_{RL})^{2}}{R_{S}}$

# B. Environmental conditions

Symbol	Parameter	Specification	Conditions etc.
Тао	Operating temperature	-10 °C to 60 °C	
Tas	Storage temp	-20 °C to 70 °C	Recommended range
RH	Relative humidity	Less than 95% RH	
(O <sub>2</sub> )	Oxygen concentration	21% (Standard condition)	Absolute minimum level: more than 18%
		The sensitivity characteristics are influenced by the variation in oxygen concentration.	


# C. Sensitivity characteristics

Model	SP-42A-00		
Symbol	Parameter	Specification	Conditions etc.
R <sub>S</sub>	Sensor resistance	4k $\Omega$ to 40k $\Omega$	at 100 ppm of R-134a
β	Ratio of sensor resistance	0.50 to 0.65	R <sub>S</sub> at 300 ppm of 134a R <sub>S</sub> at 100 ppm of R-134a
R/Rair	Resistance change in gas/air	≤ 0.40	R <sub>S</sub> at 100 ppm of 134a R <sub>S</sub> in air
Standard Test Conditions:		Temp: $20 ^{\circ}\text{C} \pm 2 ^{\circ}\text{C}$ Humidity:65% $\pm 5\%$ (in clean air)	$ \begin{array}{l} V_C: \ 10.0 \ V \pm 1\% \\ V_H: \ 5.0 \ V \pm 1\% \\ R_L: \ 10 \ k\Omega \pm 5\% \end{array} $
Pre-heating time: more than 48 hours			ore than 48 hours

### D. Mechanical characteristics

Items	Conditions		Specifications
Vibration	Frequency: Vertical amplitude: Duration:	100 cpm 4 mm 1 hour	Should satisfy the specifications shown in the
Shock	Acceleration: Number of impacts:	100 G 5 times	sensitivity characteristics.

#### Please contact

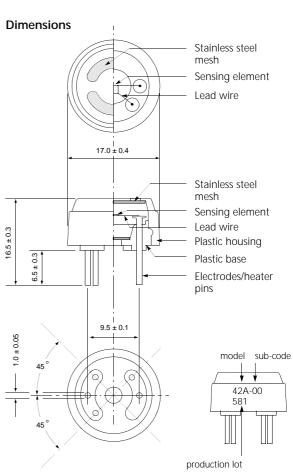

Scale: mm

Weight : 1.75g

# E. Parts and Materials

No.	Parts	Materials
1	Sensing element	Tin dioxide (SnO <sub>2</sub> )
2	Substrate	Alumina (Al <sub>2</sub> O <sub>3</sub> )
3	Lead wire	Noble metal alloy (Au-Pd-Mo)
4	Heater	Ruthenium oxide (RuO <sub>2</sub> )
5	Electrode	Gold (Au)
6	Plastic housing	Nylon 46 (UL94HB)
7	Plastic base	Nylon 66 (UL94HB)
8	Stainless steel mesh	SUS 316 (100 mesh, double)
9	Heater/electrode pins	Nickel

#### March 2006

ÎSweek www.isweek.com			
Add: 16/F, Bldg. #3, Zhongk	e Mansion, No.1 Hi-Tech S. Rd,	Hi-Tech Park South, Shenzhen, Guangdong, 518067 P.R.China	
Tel: + 86-755-83289036	Fax: + 86-755-83289052	E-mail: sales@isweek.com	