

Model JWSK-6

Rigorous Industry Temp. & Hum. Transmitter



DESCRIPTION

The model JWSK-6 series product is a temperature and humidity transmitter in the industrial fields with high acquisition, wide temperature and air dust environment. It converts the temperature and humidity of air to stand electrical signals (e.g. 4-20mA, 0-5VDC, RS-232/485) for auto control system or remote data acquisition system. It's extensively used for fields such as smart building, factory, telecommunication, electric power, petrification, environmental protection, papermaking, metallurgy, foodstuff, medical treatment etc.

PERFORMANCE SPECIFICATIONS

Power voltage	24VDC (18-30VDC) 24VAC (18-30VAC)
Accuracy (25℃)	Temperature: $\pm 0.5^{\circ}\text{C}$ ($-40^{\circ}\text{C}\sim 120^{\circ}\text{C}$) Humidity: $\pm 3.0\%\text{RH}$ or $\pm 2.0\%\text{RH}$
Output	Current two-wire 4ma to 20mA (Load < 500Ω); Voltage 0-5VDC, (Load > 1KΩ);
Response time	<15s (wind speed >1m/s)
Long-term stability	Temperature: <0.1℃/year, Humidity: <1%RH/year
Operating environment	-20℃~70℃ for transmitter, and -40℃~120℃ for sensor. 5%RH~95%RH
Mounting dimension	Wall-mounted 117mm x 86mm x 41mm (White ABS)

FEATURES

- Wall mount or Duct mount Industrial Transmitter
- $\pm 0.5^{\circ}\text{C}$, $\pm 3.0\%\text{RH}$ or $\pm 2.0\%\text{RH}$ Accuracy
- Wide temperature fields, $-40\sim 120^{\circ}\text{C}$
- Current Three-wire 4-20mA, 0-5Vdc, RS-232/485
- CE and Exia II CT6 Certifications

ORDER CODES

JWSK-6		
I1	Current three-wire 4ma to 20mA	
V1	Voltage three-wire 0 to5VDC	
V2	Voltage three-wire 0 to10VDC	
M1	Wall mount	
M2	Duct mount	
M3	Wall mount with display	
M4	Duct mount with display	
S1	normal sensor (only M1)	
S2	protected sensor	
S3	protected sensor with flange or screw thread (M22x1.5), (only M2)	
S4	divided protected sensor with 1 meter cable	
S5	divided protected sensor with 2 meter cable	
S6	divided protected sensor with 5 meter cable	
S7	divided protected sensor with 10 meter cable	
R1	0-50℃	
R3	-20~70℃	
R4	-40~120℃ (S4~S7)	
A1	$\pm 2.0\%\text{RH}$	
A2	$\pm 3.0\%\text{RH}$	


Model JWSK-6

Rigorous Industry Temp. & Hum. Transmitter


ELECTRICAL CONNECTION

Code	1(Black)	2(Blue)	3(Yellow)	4(Red)
I1	+24V	Hum.	Temp.	+24V
V1	GND	Hum.	Temp.	+24V
C1	GND	485-(B)	485+(A)	+24V
C2	GND	232Tx	232Rx	+24V

- Current three-wire 4ma to 20mA(JWSK-6I1)

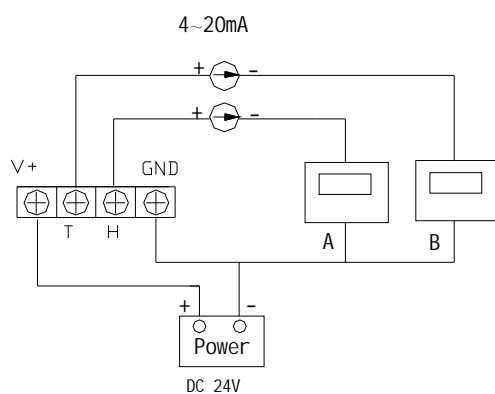

- Voltage three-wire 0 to 5VDC(JWSK-6V1)

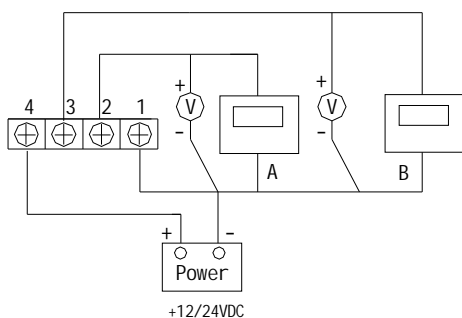

NOTES

- The transmitter should be installed in a steady area , avoid from direct sunshine, kept away from windows, air conditioning and central heating system etc. And it should not be installed on the wall which temperature value changed more than over 10℃ quickly.
- The transmitter must be preventing from the chemical agent, oil, dust and dew and ice condition. And you must avoid using the product in the condition that the temperature changed from hot to cool or contrarily.

Model JWSK-6

Rigorous Industry Temp. & Hum. Transmitter

MOUNTING DIMENSION

