

## **Carbon Monoxide Sensor CM9**

Product name: CO SENSOR

Product number: CM 9

Category: Electrochemical gas sensor






## Features:

- 1. More than ten years long life, electrochemical principle
- 2. Low sensitivity to ethanol;
- 3. Can reduce the influence of various interference gases, good linear output characteristics;
- 4. Consistency is very good;
- 5. The carbon monoxide gas selectivity and repeatability is very good;
- 6. The sensor signal output and the concentration of carbon monoxide gas into a linear relationship;
- 7. The leading production technology and new advanced materials;
- 8. Electrolyte pollution, materials comply with RoHS requirements;
- 9. Strong anti-interference;
- 10. The shell thicker will never rust, the new material used in component feet is conductive.

## **Typical Applications:**

- 1. Carbon monoxide detector alarms,
- 2. Car alarms
- 3. Smart furniture
- 4. Commercial carbon monoxide detector
- 5. Industrial carbon monoxide detector
- 6. Indoor parking ventilation control
- 7. Portable carbon monoxide concentration meter
- 8. CO detection alarm

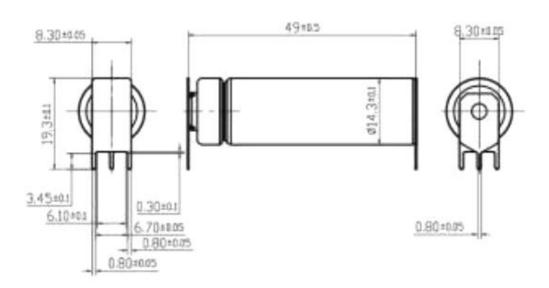



## Main parameters:

| mani parameters. |                                  |                  |
|------------------|----------------------------------|------------------|
| 1                | Length                           | 49.3±0.1mm       |
| 2                | Height                           | 19.3±0.1mm       |
| 3                | Body diameter                    | 14.3±0.1mm       |
| 4                | Pin Length                       | 3.45±0.1mm       |
| 5                | Pin spacing                      | 49±0.5mm         |
| 6                | Detection accuracy               | < 3%             |
| 7                | Detection range                  | 0-10000          |
| 8                | Output current                   | 0.8 - 2.0 nA/ppm |
| 9                | Response time                    | < 30s            |
| 10               | High concentration recovery time | < 30M            |
| 11               | Working humidity                 | 5 - 99%RH        |
| 12               | Repeatability                    | 1% F.S           |
| 13               | Hysteresis                       | 1% F.S           |
| 14               | Drift                            | 1                |
| 15               | Sensitivity                      | 1                |
| 16               | Material                         | Green polymer    |
| 17               | Protection class                 | IP55             |
| 18               | Operating temperature            | -10 ~ 60 °C      |
| 19               | Lifetime of product              | 10 years         |