

# **Product** Data Sheet

## **Product Datasheet**

## **5SF Sulfur Dioxide Sensor**

### **Document Purpose**

The purpose of this document is to present the performance specification of the 5SF sulfur dioxide gas sensor.

This document should be used in conjunction with Operating Principles (OP08) and the Product Safety Datasheet (PSDS 11).

The data provided in this document are valid at 20°C, 50% RH and 1013 mBar for 3 months from the date of sensor manufacture.

Output signal can drift below the lower limit over time. For guidance on the safe use of the sensor, please refer to the Operating Principles (OP08).



## **Product** Data Sheet

## **Technical Specifications**

#### **MEASUREMENT**

Operating Principle | 3-electrode electrochemical Measurement Range Maximum Overload

0-2000 ppm SO<sub>3</sub> 5000 ppm SO<sub>a</sub>

Filter Sensitivity\*

None  $0.10 \pm 0.02 \,\mu\text{A/ppm}$ 

Response Time (T<sub>90</sub>)\* Baseline Offset (clean air)\*

< 30 seconds 0 - 2 ppm equivalent

Maximum Zero Shift | 5 ppm equivalent (+20°C to +40°C)

Resolution

1 ppm

When using recommended electronics

1% of signal

Repeatability **Linearity** Linear

#### **ELECTRICAL**

Recommended Load Resistor | 10  $\Omega$ 

Bias Voltage | Not Required

#### **MECHANICAL**

Weight | 10 g nominal Orientation | Any

#### **ENVIRONMENTAL**

Operating Temperature Range | -20°C to +50°C See note 1 Recommended Storage Temp | 0°C to 20°C

Operating Pressure Range | Atmospheric ± 10% Pressure Coefficient | 0.004% signal / mbar


Operating Humidity Range | 15 - 90% RH non-condensing

#### LIFETIME

Long Term Sensitivity Drift | < 2% signal loss/month **Expected Operating Life** Two years in air

**Storage Life** 6 months in CTL container

## **Product Dimensions** (without bayonet fitting)

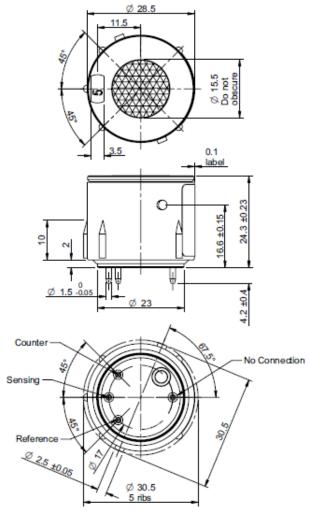

All dimensions in mm All tolerances ±0.15 mm unless otherwise stated

IMPORTANT NOTE: Connection should be made via PCB sockets only. Soldering to the pins will seriously damage your sensor.

\* Specifications are valid at 20°C, 50% RH and 1013 mBar, using City Technology recommended circuitry. Performance characteristics outline the performance of sensors supplied within the first 3 months. Output signal can drift below the lower limit over time.



## **Product** Data Sheet

## **Cross Sensitivity Table**


Whilst CiTiceLs are designed to be highly specific to the gas they are intended to measure, they will still respond to some degree to various other gases. The table below is not exclusive and other gases not included in the table may still cause a sensor to react.

IMPORTANT NOTE: The cross sensitivity data shown below does not form part of the product specification and is supplied for guidance only. Values quoted are based on tests conducted on a small number of sensors and any batch may show significant variation. For the most accurate measurements, an instrument should be calibrated using the gas under investigation.

Gas	Cross Interference (%)
Carbon Monoxide, CO	<3
Nitrogen Dioxide, NO <sub>2</sub>	~ -125
Hydrogen, H <sub>2</sub>	<3
Hydrogen Sulfide, H <sub>2</sub> S	~200
Hydrogen Chloride, HCl	~15
Ethylene, C <sub>2</sub> H <sub>4</sub>	<50
Nitric Oxide, NO	0

## <u>Product Dimensions</u> (with bayonet fitting)

□ 31.8 ±0.2



All dimensions in mm
All tolerances ±0.15 mm unless otherwise stated

### **Poisoning**

CiTiceLs are designed for operation in a wide range of environments and harsh conditions. However, it is important that exposure to high concentrations of solvent vapours is avoided, both during storage, fitting into instruments and operation.

When using sensors with printed circuit boards (PCBs), degreasing agents should be used before the sensor is fitted. Do not glue directly on or near the CiTiceL as the solvent may cause crazing of the plastic.

## SAFETY NOTE

This sensor is designed to be used in safety critical applications. To ensure that the sensor and/or instrument in which it is used, are operating properly, it is a requirement that the function of the device is confirmed by exposure to target gas (bump check) before each use of the sensor and/or instrument. Failure to carry out such tests may jeopardize the safety of people and property.

Every effort has been made to ensure the accuracy of this document at the time of printing. In accordance with the company's policy of continued product improvement City Technology Limited reserves the right to make product changes without notice. The products are always subject to a programme of improvement and testing which may result in some changes in the characteristics quoted. As the products may be used by the client in circumstances beyond the knowledge and control of City Technology Limited, we cannot give any warranty as to the relevance of these particulars to an application. It is the clients' responsibility to carry out the necessary tests to determine the usefulness of the products and to ensure their safety of operation in a particular application.

Sweek www.isweek.com

Add: 16/F, Bldg. #3, Zhongke Mansion, No.1 Hi-Tech S. Rd, Hi-Tech Park South, Shenzhen, Guangdong, 518067 P.R.China

Tel: +86-755-83289036

Fax: +86-755-83289052

E-mail: sales@isweek.com